Modern C++ Programming

20. Performance Optimization II Code Optimization

Federico Busato

■ I/O Operations

- printf
- Memory Mapped I/O
- Speed Up Raw Data Loading

2 Memory Optimizations

- Heap Memory
- Stack Memory
- Cache Utilization
- Data Alignment

3 Arithmetic

- Data Types
- Operations
- Conversion
- Floating-Point
- Compiler Intrinsic Functions
- Value in a Range
- Lookup Table

4 Control Flow

- Loop Hoisting
- Loop Unrolling
- Branch Hints [[likely]] / [[unlikely]]
- Compiler Hints [[assume]]
- Recursion

5 Functions

- Function Call Cost
- Argument Passing
- Function Optimizations
- Function Inlining
- Pointers Aliasing

6 Object-Oriented Programming

■ Object RAII Optimizations

I/O Operations

I/O Operations

I/O Operations are orders of magnitude slower than memory accesses

I/O Streams

In general, input/output operations are one of the most expensive

- Use endl for ostream only when it is strictly necessary (prefer \n)
- Disable synchronization with printf/scanf: std::ios_base::sync_with_stdio(false)
- Disable IO flushing when mixing istream/ostream calls: <istream_obj>.tie(nullptr);
- Increase IO buffer size:
 file.rdbuf()->pubsetbuf(buffer_var, buffer_size);

I/O Streams - Example

```
#include <iostream>
int main() {
    std::ifstream fin;
    std::ios_base::sync_with_stdio(false); // sync_disable
    fin.tie(nullptr);
                                          // flush disable
                                           // buffer increase
    const int BUFFER_SIZE = 1024 * 1024; // 1 MB
    char buffer[BUFFER SIZE]:
    fin.rdbuf()->pubsetbuf(buffer, BUFFER SIZE);
    fin.open(filename); // Note: open() after optimizations
    // IO operations
    fin.close():
```

- printf is faster than ostream (see speed test link)
- A printf call with a simple format string ending with \n is converted to a puts() call

```
printf("Hello World\n");
printf("%s\n", string);
```

Memory Mapped I/O

A **memory-mapped file** is a segment of virtual memory that has been assigned a direct byte-for-byte correlation with some portion of a file

Benefits:

- Orders of magnitude faster than system calls
- Input can be "cached" in RAM memory (page/file cache)
- A file requires disk access only when a new page boundary is crossed
- Memory-mapping may bypass the page/swap file completely
- Load and store raw data (no parsing/conversion)

```
#if !defined( linux )
    #error It works only on linux
#endif
#include <fcntl.h> //::open
#include <sys/mman.h> //::mmap
#include <sys/stat.h> //::open
#include <sys/types.h> //::open
#include <unistd.h> //::lseek
// usage: ./exec <file> <byte size> <mode>
int main(int argc, char* argv[]) {
   size_t file_size = std::stoll(argv[2]);
   auto is read = std::string(argv[3]) == "READ";
  int fd = is_read ? ::open(argv[1], O_RDONLY) :
                     ::open(argv[1], O_RDWR | O_CREAT | O_TRUNC, S_IRUSR | S_IWUSR);
  if (fd == -1)
      ERROR("::open")
                           // try to get the last bute
   if (::lseek(fd, static cast<off t>(file size - 1), SEEK SET) == -1)
      ERROR("::lseek")
   if (!is_read && ::write(fd, "", 1) != 1) // try to write
      ERROR("::write")
```

Memory Mapped I/O Example

```
auto mm_mode = (is_read) ? PROT_READ : PROT_WRITE;
// Open Memory Mapped file
auto mmap_ptr = static_cast<char*>(
                ::mmap(nullptr, file_size, mm_mode, MAP_SHARED, fd, 0) );
if (mmap_ptr == MAP_FAILED)
    ERROR("::mmap");
// Advise sequential access
if (::madvise(mmap ptr, file size, MADV SEQUENTIAL) == -1)
    ERROR("::madvise");
// MemoryMapped Operations
// read from/write to "mmap ptr" as a normal array: mmap ptr[i]
// Close Memory Mapped file
if (::munmap(mmap_ptr, file_size) == -1)
    ERROR("::munmap"):
if (::close(fd) == -1)
    ERROR("::close"):
```

Consider using optimized (low-level) numeric conversion routines:

```
template<int N, unsigned MUL, int INDEX = 0>
struct fastStringToIntStr;
inline unsigned fastStringToUnsigned(const char* str, int length) {
    switch(length) {
        case 10: return fastStringToIntStr<10, 1000000000>::aux(str);
             9: return fastStringToIntStr< 9, 100000000>::aux(str);
        case
             8: return fastStringToIntStr< 8, 10000000>::aux(str);
        case
             7: return fastStringToIntStr< 7, 1000000>::aux(str);
        case
        case
             6: return fastStringToIntStr< 6, 100000>::aux(str);
        case
             5: return fastStringToIntStr< 5, 10000>::aux(str);
             4: return fastStringToIntStr< 4, 1000>::aux(str);
        case
             3: return fastStringToIntStr< 3, 100>::aux(str);
        case
        case
             2: return fastStringToIntStr< 2, 10>::aux(str);
             1: return fastStringToIntStr< 1, 1>::aux(str);
        default: return 0:
```

```
template<int N, unsigned MUL, int INDEX>
struct fastStringToIntStr {
    static inline unsigned aux(const char* str) {
        return static cast<unsigned>(str[INDEX] - '0') * MUL +
               fastStringToIntStr<N - 1, MUL / 10, INDEX + 1>::aux(str);
};
template<unsigned MUL, int INDEX>
struct fastStringToIntStr<1, MUL, INDEX> {
    static inline unsigned aux(const char* str) {
        return static cast<unsigned>(str[INDEX] - '0');
    }
};
```

- Hard disk is orders of magnitude slower than RAM
- Parsing is faster than data reading
- Parsing can be avoided by using binary storage and mmap
 - Decreasing the number of hard disk accesses improves the performance \rightarrow compression

LZ4 is lossless compression algorithm providing extremely fast decompression up to 35% of memcpy and good compression ratio github.com/lz4/lz4

Another alternative is $Facebook\ zstd$ github.com/facebook/zstd

Performance comparison of different methods for a file of 4.8 GB of integer values

Load Method	Exec. Time	Speedup
ifstream	102 667 ms	1.0×
memory mapped + parsing (first run)	30 235 ms	3.4×
memory mapped + parsing (second run)	22 509 ms	4.5×
memory mapped + lz4 (first run)	3 914 ms	26.2×
memory mapped + 1z4 (second run)	1 261 ms	81.4×

NOTE: the size of the Lz4 compressed file is 1,8 $\ensuremath{\mathsf{GB}}$

Memory

Optimizations

Heap Memory

- Dynamic heap allocation is expensive: implementation dependent and interact with the operating system
- Many small heap allocations are more expensive than one large memory allocation
 The default page size on Linux is 4 KB. For smaller/multiple sizes, C++ uses a
 sub-allocator

Allocations within the page size is faster than larger allocations (sub-allocator)

Stack Memory

- Stack memory is faster than heap memory. The stack memory provides high locality, it is small (cache fit), and its size is known at compile-time
- static stack allocations produce better code. It avoids filling the stack each time the function is reached
- constexpr arrays with dynamic indexing produces very inefficient code with GCC. Use static constexpr instead

```
void f(int x) {
// bad performance with GCC
// constexpr int array[] = {1,2,3,4,5,6,7,8,9};
    static constexpr int array[] = {1,2,3,4,5,6,7,8,9};
    return array[x];
}
```

Cache Utilization

Maximize cache utilization:

- Maximize spatial and temporal locality (see next examples)
- Prefer small data types
- Prefer std::vector<bool> over array of bool
- Prefer std::bitset<N> over std::vector<bool> if the data size is known in advance or bounded

A, B, C matrices of size $N \times N$

```
for (int i = 0; i < N; i++) {
    for (int j = 0; j < N; j++) {
        int sum = 0;
        for (int k = 0; k < N; k++)
            sum += A[i][k] * B[k][j]; // row × column
        C[i][j] = sum;
    }
}</pre>
```

```
for (int i = 0; i < N; i++) {
    for (int j = 0; j < N; j++) {
        int sum = 0;
        for (int k = 0; k < N; k++)
            sum += A[i][k] * B[j][k]; // row × row
        C[i][j] = sum;
    }
}</pre>
```

Benchmark:

N	64	128	256	512	1024
A * B	$< 1 \; \mathrm{ms}$	5 ms	29 ms	141 ms	1,030 ms
$A * B^T$	$< 1 \; \mathrm{ms}$	2 ms	6 ms	48 ms	385 ms
Speedup	/	2.5x	4.8x	2.9x	2.7×

Temporal-Locality Example

Speeding up a random-access function

```
V1 : 436 ms, V2 : 336 ms \rightarrow 1.3x speedup (temporal locality improvement) .. but it needs a careful evaluation of CACHE and it can even decrease the performance for
```

other sizes

pre-sorted hash(i): 135 ms \rightarrow 3.2x speedup (spatial locality improvement)

Data Alignment

Data alignment allows avoiding unnecessary memory accesses, and it is also essential to exploit hardware vector instructions (SIMD) like SSE, AVX, etc.

- Internal alignment: reducing memory footprint, optimizing memory bandwidth, and minimizing cache-line misses
- External alignment: minimizing cache-line misses

Internal Structure Alignment

```
struct A1 {
                                              struct A2 {    // internal alignment
  char x1; // offset 0
                                                 char x1; // offset 0
  double v1; // offset 8!! (not 1)
                                                 char x2; // offset 1
  char x2; // offset 16
                                                 char x3; // offset 2
  double y2; // offset 24
                                                 char x4; // offset 3
  char x3; // offset 32
                                                 char x5; // offset 4
  double v3: // offset 40
                                                 double v1: // offset 8
  char x4; // offset 48
                                                 double v2; // offset 16
  double y4; // offset 56
                                                 double v3: // offset 24
  char x5; // offset 64 (65 bytes)
                                                 double v4; // offset 32 (40 bytes)
```

Considering an array of structures (AoS), there are two problems:

- We are wasting 40% of memory in the first case (A1)
- In common x64 processors the cache line is 64 bytes. For the first structure A1, every access involves two cache line operations (2x slower)

External Structure Alignment and Padding

Considering the previous example for the structure A2, random loads from an array of structures A2 leads to one or two cache line operations depending on the alignment at a specific index, e.g.

```
index 0 \rightarrow one cache line load index 1 \rightarrow two cache line loads
```

It is possible to fix the structure alignment in two ways:

- The memory padding refers to introduce extra bytes at the end of the data structure to enforce the memory alignment
 e.g. add a char array of size 24 to the structure A2
- Align keyword or attribute allows specifying the alignment requirement of a type or an object (next slide)

C++ allows specifying the alignment requirement in different ways:

- C++11 alignas(N) only for variable / struct declaration
- C++17 aligned new (e.g. new int[2, N])
- Compiler Intrinsic only for variables / struct declaration
 - GCC/Clang: __attribute__((aligned(N)))
 - MSVC: __declspec(align(N))
- Compiler Intrinsic for dynamic pointer
 - GCC/Clang: __builtin_assume_aligned(x)
 - Intel: __assume_aligned(x)

```
struct alignas(16) A1 { // C++11
    int x, y;
};
struct __attribute__((aligned(16))) A2 { // compiler-specific attribute
    int x, y;
};
auto ptr1 = new int[100, 16]; // 16B alignment, C++17
auto ptr2 = new int[100];  // 4B alignment guarantee
auto ptr3 = __builtin_assume_aligned(ptr2, 16); // compiler-specific attribute
auto ptr4 = new A1[10];  // no alignent quarantee
```

Multi-Threading and Caches

The **CPU/threads affinity** controls how a process is mapped and executed over multiple cores (including sockets). It affects the process performance due to core-to-core communication and cache line invalidation overhead

Maximizing threads "clustering" on a single core can potentially lead to higher cache hits rate and faster communication. On the other hand, if the threads work independently/almost independently, namely they show high locality on their working set, mapping them to different cores can improve the performance

Arithmetic

Hardware Notes

- Instruction throughput greatly depends on processor model and characteristics
- Modern processors provide separated units for floating-point computation (FPU)
- Addition, subtraction, and bitwise operations are computed by the ALU and they have very similar throughput
- In modern processors, multiplication and addition are computed by the same hardware component for decreasing circuit area → multiplication and addition can be fused in a single operation fma (floating-point) and mad (integer)

Data Types

 32-bit integral vs. floating-point: in general, integral types are faster, but it depends on the processor characteristics

32-bit types are faster than 64-bit types

- 64-bit integral types are slightly slower than 32-bit integral types. Modern processors widely support native 64-bit instructions for most operations, otherwise they require multiple operations
- Single precision floating-points are up to three times faster than double precision floating-points
- Small integral types are slower than 32-bit integer, but they require less memory \rightarrow cache/memory efficiency

Operations

- In modern architectures, arithmetic increment/decrement ++ / -- has the same performance of add / sub
- Prefer prefix operator (++var) instead of the postfix operator (var++) *
- Use the compound operators (a += b) instead of operators combined with assignment (a = a + b) *
- ullet Keep near constant values/variables o the compiler can merge their values

^{*} the compiler automatically applies such optimization whenever possible (this is not ensured for object types)

Integer Multiplication

Integer multiplication requires double the number of bits of the operands

```
// 32-bit PLATFROM
int f1(int x, int v) {
    return x * v: // efficient but can overflow
int64_t f2(int64_t x, int64_t y) {
    return x * y; // always correct but slow
int64_t f3(int x, int y) {
    return x * static_cast<int64_t>(y); // correct and efficient!!
```

Power-of-Two Multiplication/Division/Modulo

- Prefer shift for power-of-two multiplications ($a \ll b$) and divisions ($a \gg b$) only for run-time values *
- Some unsigned operations are faster than signed operations (deal with negative number), e.g. x / 2
- Prefer bitwise AND (a % b \rightarrow a & (b 1)) for **power-of-two modulo** operations only for run-time values *
- Constant multiplication and division can be heavily optimized by the compiler, even for non-trivial values

^{*} the compiler automatically applies such optimizations if b is known at compile-time. Bitwise operations make the code harder to read

Ideal divisors: when a division compiles down to just a multiplication

Conversion

From	То	Cost	
Signed	Unsigned	no cost, bit representation is the same	
Unsigned	Larger Unsigned	no cost, register extended	
Signed	Larger Signed	$1\ {\sf clock\text{-}cycle},\ {\sf register} + {\sf sign}\ {\sf extended}$	
Integer	Floating-point	4-16 clock-cycles Signed \rightarrow Floating-point is faster than Unsigned \rightarrow Floating-point (except AVX512 instruction set is enabled)	
Floating-point	Integer	fast if SSE2, slow otherwise (50-100 clock-cycles)	

Floating-Point Division

not optimized:

Multiplication is much faster than division*

// "value" is floating-point (dynamic)

for (int i = 0; i < N; i++)

^{*} Multiplying by the inverse is not the same as the division see lemire.me/blog/2019/03/12

Floating-Point FMA

Modern processors allow performing a * b + c in a single operation, called **fused multiply-add** (std::fma in C++11). This implies better performance and accuracy

CPU processors perform computations with a larger register size than the original data type (e.g. 48-bit for 32-bit floating-point) for performing this operation

Compiler behavior:

- GCC 9 and ICC 19 produce a single instruction for std::fma and for a * b + c with -03 -march=native
- Clang 9 and MSVC 19.* produce a single instruction for std::fma but not for a * b + c

FMA: solve quadratic equation

FMA: extended precision addition and multiplication by constant

Compiler intrinsics are highly optimized functions directly provided by the compiler instead of external libraries

Advantages:

- Directly mapped to hardware functionalities if available
- Inline expansion
- Do not inhibit high-level optimizations and they are portable contrary to asm code

Drawbacks:

- Portability is limited to a specific compiler
- Some intrinsics do not work on all platforms
- The same instrictics can be mapped to a non-optimal instruction sequence depending on the compiler

Compiler Intrinsic Functions

Most compilers provide intrinsics **bit-manipulation functions** for SSE4.2 or ABM (Advanced Bit Manipulation) instruction sets for Intel and AMD processors GCC examples:

```
__builtin_popcount(x) count the number of one bits
```

- __builtin_clz(x) (count leading zeros) counts the number of zero bits following the most significant one bit
- __builtin_ctz(x) (count trailing zeros) counts the number of zero bits preceding the least significant one bit
- __builtin_ffs(x) (find first set) index of the least significant one bit

■ Compute integer log2

```
inline unsigned log2(unsigned x) {
   return 31 - __builtin_clz(x);
}
```

• Check if a number is a power of 2

```
inline bool is_power2(unsigned x) {
   return __builtin_popcount(x) == 1;
}
```

Bit search and clear

```
inline int bit_search_clear(unsigned x) {
   int pos = __builtin_ffs(x); // range [0, 31]
   x    &= ~(1u << pos);
   return pos;
}</pre>
```

Example of intrinsic portability issue:

```
__builtin_popcount() GCC produces __popcountdi2 instruction while Intel Compiler (ICC) produces 13 instructions
```

_mm_popent_u32 GCC and ICC produce popent instruction, but it is available only for processor with support for SSE4.2 instruction set

More advanced usage

- Compute CRC: _mm_crc32_u32
- AES cryptography: _mm256_aesenclast_epi128
- Hash function: _mm_sha256msg1_epu32

Using intrinsic instructions is <u>extremely dangerous</u> if the target processor does not natively support such instructions

Example:

"If you run code that uses the intrinsic on hardware that doesn't support the <code>lzcnt</code> instruction, the results are unpredictable" - MSVC

on the contrary, GNU and clang $__builtin_*$ instructions are always well-defined. The instruction is translated to a non-optimal operation sequence in the worst case

The instruction set support should be checked at *run-time* (e.g. with __cpuid function on MSVC), or, when available, by using compiler-time macro (e.g. __AVX__)

Automatic Compiler Function Transformation

std::abs can be recognized by the compiler and transformed to a hardware instruction

In a similar way, C++20 provides a portable and efficient way to express bit operations <bit>

```
rotate left : std::rotl
  rotate right : std::rotr
count leading zero : std::countl_zero
  count leading one : std::countl_one
count trailing zero : std::countr_zero
  count trailing one : std::countr_one
  population count : std::popcount
```

Value in a Range

Checking if a non-negative value x is within a range [A, B] can be optimized if B > A (useful when the condition is repeated multiple times)

```
if (x >= A \&\& x <= B)
// STEP 1: subtract A
if (x - A) = A - A \&\& x - A \le B - A)
// -->
if (x - A >= 0 \&\& x - A <= B - A) // B - A is precomputed
// STEP 2
// - convert "x - A >= 0" --> (unsigned) (x - A)
// - "B - A" is always positive
if ((unsigned) (x - A) <= (unsigned) (B - A))
```

Value in a Range Examples

Check if a value is an uppercase letter:

```
uint8_t x = ...

if (x >= 'A' && x <= 'Z') 

...

uint8_t x = ...

if (x - 'A' <= 'Z')

...
```

A more general case:

```
int x = \dots

if (x \ge -10 \&\& x \le 30) \longrightarrow if ((unsigned) (x + 10) \le 40)

\dots
```

Lookup Table

Lookup table (LUT) is a *memoization* technique which allows replacing *runtime* computation with precomputed values

Example: a function that computes the logarithm base 10 of a number in the range [1-100]

```
template<int SIZE, typename Lambda>
constexpr std::array<float, SIZE> build(Lambda lambda) {
    std::array<float, SIZE> array{};
   for (int i = 0; i < SIZE; i++)
        arrav[i] = lambda(i);
   return array;
float log10(int value) {
    constexpr auto lamba = [](int i) { return std::log10f((float) i): };
    static constexpr auto table = build<100>(lambda);
   return table[value];
```

Low-Level Optimizations

Collection of low-level implementations/optimization of common operations:

- Bit Twiddling Hacks graphics.stanford.edu/~seander/bithacks.html
- The Aggregate Magic Algorithms aggregate.org/MAGIC
- Hackers Delight Book www.hackersdelight.org

Low-Level Information

The same instruction/operation may take different clock-cycles on different architectures/CPU type

- Agner Fog Instruction tables (latencies, throughputs)
 www.agner.org/optimize/instruction_tables.pdf
 - Latency, Throughput, and Port Usage Information uops.info/table.html

Control Flow

Computation is faster than decision

Pipelines are an essential element in modern processors. Some processors have up to 20 pipeline stages (14/16 typically)

The downside to long pipelines includes the danger of **pipeline stalls** that waste CPU time, and the time it takes to reload the pipeline on **conditional branch** operations (if, while, for)

- Prefer switch statements instead of multiple if
 - If the compiler does not use a jump-table, the cases are evaluated in order of appearance \to the most frequent cases should be placed before
 - Some compilers (e.g. clang) are able to translate a sequence of if into a switch
- Prefer square brackets syntax [] over pointer arithmetic operations for array access to facilitate compiler loop optimizations (polyhedral loop transformations)
- Prefer signed integer for loop indexing. The compiler optimizes more aggressively such loops since integer overflow is not defined
- Prefer range-based loop for iterating over a container ¹

- In general, if statements affect performance when the branch is taken
- Some compilers (e.g. clang) use assertion for optimization purposes: most likely code path, not possible values, etc. ²
- Not all control flow instructions (or branches) are translated into jump instructions. If the code in the branch is small, the compiler could optimize it in a conditional instruction, e.g. ccmovl
 Small code section can be optimized in different ways ³ (see next slides)

¹ Branch predictor: How many 'if's are too many?

² Andrei Alexandrescu

³ Is this a branch?

Minimize Branch Overhead

- Branch prediction: technique to guess which way a branch takes. It requires
 hardware support and it is generically based on dynamic history of code executing
- Branch predication: a conditional branch is substituted by a sequence of
 instructions from both paths of the branch. Only the instructions associated to a
 predicate (boolean value), that represents the direction of the branch, are actually
 executed

```
int x = (condition) ? A[i] : B[i];
P = (condition) // P: predicate

P x = A[i];
e!P x = B[i];
```

51/76

• **Speculative execution**: execute both sides of the conditional branch to better utilize the computer resources and commit the results associated to the branch taken

Loop Hoisting

Loop Hoisting, also called *loop-invariant code motion*, consists of moving statements or expressions outside the body of a loop *without affecting the semantics* of the program

```
Base case:

for (int i = 0; i < 100; i++)
    a[i] = x + y;

Better:

v = x + y;

for (int i = 0; i < 100; i++)
    a[i] = v;</pre>
```

Loop hoisting is also important in the evaluation of loop conditions

```
Base case:

// "x" never changes
for (int i = 0; i < f(x); i++)
   a[i] = y;

Better:

int limit = f(x);
for (int i = 0; i < limit; i++)
   a[i] = y;</pre>
```

In the worst case, f(x) is evaluated at every iteration (especially when it belongs to another translation unit) 52/76

Loop unrolling (or **unwinding**) is a loop transformation technique which optimizes the code by removing (or reducing) loop iterations

The optimization produces better code at the expense of binary size

Example:

```
for (int i = 0; i < N; i++)
sum += A[i];</pre>
```

can be rewritten as:

```
for (int i = 0; i < N; i += 8) {
    sum += A[i];
    sum += A[i + 1];
    sum += A[i + 2];
    sum += A[i + 3];
    ...
} // we suppose N is a multiple of 8</pre>
```

Loop unrolling can make your code <u>better/faster</u>:

- + Improve instruction-level parallelism (ILP)
- + Allow vector (SIMD) instructions
- + Reduce control instructions and branches

Loop unrolling can make your code worse/slower:

- Increase compile-time/binary size
- Require more instruction decoding
- Use more memory and instruction cache

Unroll directive The Intel, IBM, and clang compilers (but not GCC) provide the preprocessing directive #pragma unroll (to insert above the loop) to force loop unrolling. The compiler already applies the optimization in most cases

Branch Hints - [[likely]] / [[unlikely]]

C++20 [[likely]] and [[unlikely]] provide a hint to the compiler to optimize a conditional statement, such as while, for, if

```
for (i = 0; i < 300; i++) {
    [[unlikely]] if (rand() < 10)
        return false;
}</pre>
```

```
switch (value) {
  [[likely]]   case 'A': return 2;
  [[unlikely]]   case 'B': return 4;
}
```

Compiler Hints - [[assume]]


C++23 allows defining an assumption in the code that is always true

Some compilers define __builtin_assume_aligned(ptr, alignent) to assume that the returned pointer is at least alignent bytes aligned, and optimize the memory accesses

Avoid run-time recursion (very expensive). Prefer *iterative* algorithms instead (see next slides)

Recursion cost: The program must store all variables (snapshot) at each recursion iteration on the stack, and remove them when the control return to the caller instance

The **tail recursion** optimization avoids maintaining caller stack and pass the control to the next iteration. The optimization is possible only if all computation can be executed before the recursive call

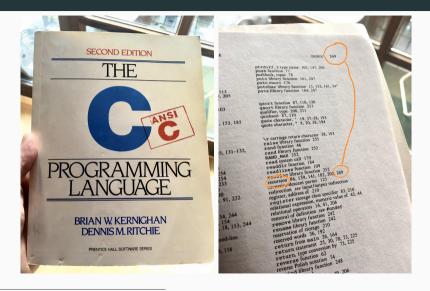

Functions

Function Call Cost

Function call methods:

Direct Function address is known at compile-time
Indirect Function address is known only at run-time
Inline The function code is fused in the caller code

Function call cost:

- The caller pushes the arguments on the stack in reverse order
- Jump to function address
- The caller clears (pop) the stack
- The function pushes the return value on the stack
- Jump to the caller address

pass by-value Small data types ($\leq 8/16$ bytes)

The data are copied into registers, instead of stack It avoids aliasing performance issues

pass by-pointer Introduces one level of indirection

They should be used only for raw pointers (potentially NULL)

pass by-reference May not introduce one level of indirection if related in the same translation unit/LTO

pass-by-reference is more efficient than pass-by-pointer as it facilitates variable elimination by the compiler, and the function code does not require checking for NULL pointer

For *active* objects with <u>non-trivial</u> copy constructor or destructor:

by-value Could be $\underline{\text{very}}$ expensive, and hard to optimize

by-pointer/reference Prefer pass-by- const -pointer/reference const function member overloading can also be cheaper

For *passive* objects with trivial copy constructor *and* destructor:

by-value/by-reference Most compilers optimize pass by-value with pass by-reference and the opposite case for passive data structures if related to

the same translation unit/LTO

by-const-value Always produce the optimal code if applied in the same translation unit/LTO. It is converted to pass-by-const ref if needed

In general, it should be avoided for as it does not change the function signature

by-value Doesn't always produce the optimal code for large data structures

by-reference Could introduce a level of indirection

Function Optimizations

- Keep small the number of function parameters. The parameters can be passed by using the registers instead filling and emptying the stack
- Consider combining several function parameters in a structure
- const modifier applied to pointers and references does not produce better code
 in most cases, but it is useful for ensuring read-only accesses
- __attribute__(pure) attribute (Clang, GCC) specifies that a function has no side effects on its parameters
- __attribute__(const) attribute (Clang, GCC) specifies that a function has no side effects on its parameters and global variables

inline (internal linkage)

inline specifier when applied to internal linkage functions (static or anonymous namespace) is a hint for the compiler.

The code of the function can be copied where it is called (inlining)

```
inline void f() { ... }
```

- It is just a hint for the compiler that can ignore it (inline increases the compiler heuristic threshold)
- inline functions increase the binary size because they are expanded in-place for every function call

Compilers have different heuristics for function inlining

- Number of lines (even comments: How new-lines affect the Linux kernel performance)
- Number of assembly instructions
- Inlining depth (recursive)

GCC/Clang extensions allow to *force* inline/non-inline functions:

```
__attribute__((always_inline)) void f() { ... }
__attribute__((noinline)) void f() { ... }
```

- An Inline Function is As Fast As a Macro
- Inlining Decisions in Visual Studio

Local Functions

All compilers, except MSVC, export all function symbols \rightarrow slow, the symbols can be used in other translation units

Alternatives:

- Use static functions
- Use anonymous namespace (functions and classes)
- Use GNU extension (also clang) __attribute__((visibility("hidden")))

Consider the following example:

```
// suppose f() is not inline
void f(int* input, int size, int* output) {
  for (int i = 0; i < size; i++)
     output[i] = input[i];
}</pre>
```

- The compiler <u>cannot</u> <u>unroll</u> the loop (sequential execution, no ILP) because output and <u>input</u> pointers can be **aliased**, e.g. output = input + 1
- The aliasing problem is even worse for more complex code and inhibits all kinds of optimization including code re-ordering, vectorization, common sub-expression elimination, etc.

Most compilers (included GCC/Clang/MSVC) provide **restricted pointers** (<u>restrict</u>) so that the programmer asserts that the pointers are not aliased

Potential benefits:


- Instruction-level parallelism
- Less instructions executed
- Merge common sub-expressions

Benchmarking matrix multiplication

Optimization	-01	-02	-03
v1	1,030 ms	777 ms	777 ms
v2	513 ms	510 ms	761 ms
Speedup	2.0x	1.5×	1.02×

Pointers Aliasing

```
void foo(std::vector<double>& v, const double& coeff) {
    for (auto& item : v) item *= std::sinh(coeff);
}
vs.
void foo(std::vector<double>& v, double coeff) {
    for (auto& item : v) item *= std::sinh(coeff);
}
```

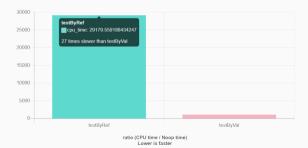

Object-Oriented

Programming

Variable/Object Scope

Declare local variable in the innermost scope

- the compiler can more likely fit them into registers instead of stack
- it improves readability

```
Wrong:

int i, x;
for (i = 0; i < N; i++) {
    x = value * 5;
    sum += x;
}

Correct:

for (int i = 0; i < N; i++) {
    int x = value * 5;
    sum += x;
}</pre>
```

C++17 allows local variable initialization in if and while statements, while
 C++20 introduces them for in range-based loops

Variable/Object Scope

Exception! Built-in type variables and passive structures should be placed in the innermost loop, while objects with constructors should be placed outside loops

```
for (int i = 0; i < N; i++) {
    std::string str("prefix_");
    std::cout << str + value[i];
} // str call CTOR/DTOR N times
}</pre>
std::string str("prefix_");
for (int i = 0; i < N; i++) {
    std::cout << str + value[i];
}
</pre>
```

Object RAII Optimizations

 Prefer direct initialization and full object constructor instead of two-step initialization (also for variables)

- Prefer move semantic instead of copy constructor. Mark copy constructor as
 =delete (sometimes it is hard to see, e.g. implicit)
- Ensure defaulted default and copy constructors = default to enable vectorization

Object Dynamic Behavior Optimizations

- Virtual calls are slower than standard functions
 - Virtual calls prevent any kind of optimizations as function lookup is at runtime (loop transformation, vectorization, etc.)
 - Virtual call overhead is up to 20%-50% for function that can be inlined
- Mark final all virtual functions that are not overridden
- Avoid dynamic operations: exceptions(and use noexcept), dynamic_cast, smart pointer

- The Hidden Performance Price of Virtual Functions
- Investigating the Performance Overhead of C++ Exceptions

Object Operation Optimizations

- Use static for all members that do not use instance member (avoid passing this pointer)
- Avoid multiple + operations between objects to avoid temporary storage
- Prefer ++obj / --obj (return &obj), instead of obj++ , obj-- (return old obj)
- lacktriangledown Prefer lacktriangledown += obj , instead of lacktriangledown = x + obj lacktriangledown avoid the object copy

Object Implicit Conversion

```
struct A { // big object
    int array[10000];
};
struct B {
    int array[10000];
    B() = default;
    B(const A& a) { // user-defined constructor
        std::copy(a.array, a.array + 10000, array);
};
void f(const B& b) {}
A a;
B b;
f(b); // no cost
f(a); // very costly!! implicit conversion
```