

# Modern C++ Programming

## 14. CONTAINERS, ITERATORS, AND ALGORITHMS

---

*Federico Busato*

University of Verona, Dept. of Computer Science  
2021, v3.04



## 1 Containers and Iterators

## 2 Sequence Containers

- `std::array`
- `std::vector`
- `std::deque`
- `std::list`
- `std::forward_list`

# Table of Context

## 3 Associative Containers

- std::set
- std::map
- std::multiset

## 4 Container Adaptors

- std::stack , std::queue , std::priority\_queue

## 5 View

- std::span

# Table of Context

## 6 Implement a Custom Iterator

- Semantic
- Implement a Simple Iterator

## 7 Iterator Utility Methods

- `std::advance`, `std::next`
- `std::prev`, `std::distance`
- Range Access Methods
- Iterator Traits

## 8 Algorithms Library

- `std::find_if`, `std::sort`
- `std::accumulate`, `std::generate`, `std::remove_if`

# Containers and Iterators

---

# Containers and Iterators

## Container

A **container** is a class, a data structure, or an abstract data type, whose instances are collections of other objects

- *Containers* store objects following specific access rules

## Iterator

An **iterator** is an object allowing to traverse a container

- *Iterators* are a generalization of pointers
- A pointer is the simplest *iterator* and it supports all its operations

**C++ Standard Template Library (STL)** is strongly based on *containers* and *iterators*

## Reasons to use Standard Containers

- STL containers eliminate redundancy, and save time avoiding to write your own code (productivity)
- STL containers are implemented correctly, and they do not need to spend time to debug (reliability)
- STL containers are well-implemented and fast
- STL containers do not require external libraries
- STL containers share common interfaces, making it simple to utilize different containers without looking up member function definitions
- STL containers are well-documented and easily understood by other developers, improving the understandability and maintainability
- STL containers are thread safe. Sharing objects across threads preserve the consistency of the container

## Container Properties

C++ Standard Template Library (STL) Containers have the following properties:

- Default constructor
- Destructor
- Copy constructor and assignment (deep copy)
- Iterator methods `begin()`, `end()`
- Support `std::swap`
- Content-based and order equality (`==`, `!=`)
- Lexicographic order comparison (`>`, `>=`, `<`, `<=`)
- `size()` \*, `empty()`, and `max_size()` methods

\* except for `std::forward_list`

# Iterator Concept

**STL containers** provide the following methods to get iterator objects:

- `begin()` returns an iterator pointing to the first element
- `end()` returns an iterator pointing to the end of the container (i.e. the element after the last element)

**Iterator** supports a subset of the following operations:

Operation	Example
Read	<code>*it</code>
Write	<code>*it =</code>
Increment	<code>it++</code>
Decrement	<code>it--</code>
Comparison	<code>it1 &lt; it2</code>
Random access	<code>it + 4, it[2]</code>

# Sequence Containers

---

## Overview


**Sequence containers** are data structures storing objects of the same data type in a linear mean manner

The *STL Sequence Container* types are:


- `std::array` provides a *fixed-size contiguous array* (on stack)
- `std::vector` provides a *dynamic contiguous array*
- `std::list` provides a *double-linked list*
- `std::deque` provides a *double-ended queue* (implemented as array-of-array)
- `std::forward_list` provides a *single-linked list*

While `std::string` is not included in most container lists, it actually meets the requirements of a Sequence Container

`std::array`

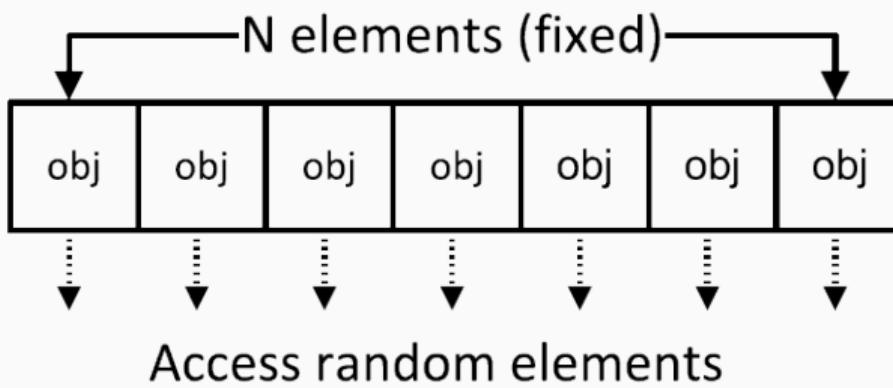


## `std::vector`

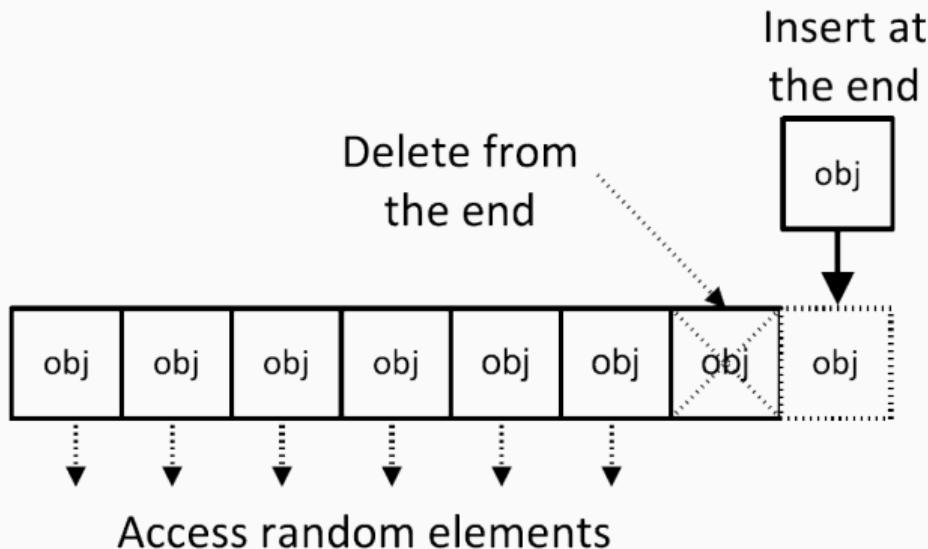

### Other methods:

- `resize()` resizes the allocated elements of the container
- `capacity()` number of allocated elements
- `reserve()` resizes the allocated memory of the container (not size)
- `shrink_to_fit()` reallocate to remove unused capacity
- `clear()` removes all elements from the container (no reallocation)


## `std::deque`

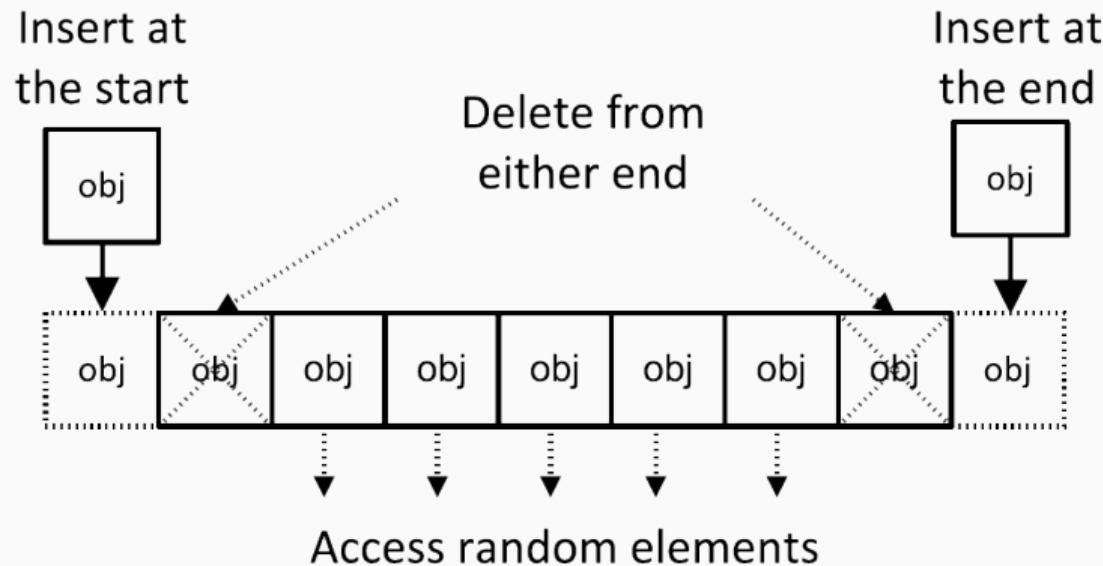

### Other methods:

- `resize()` resizes the allocated elements of the container
- `shrink_to_fit()` reallocate to remove unused capacity
- `clear()` removes all elements from the container (no reallocation)

## std::list

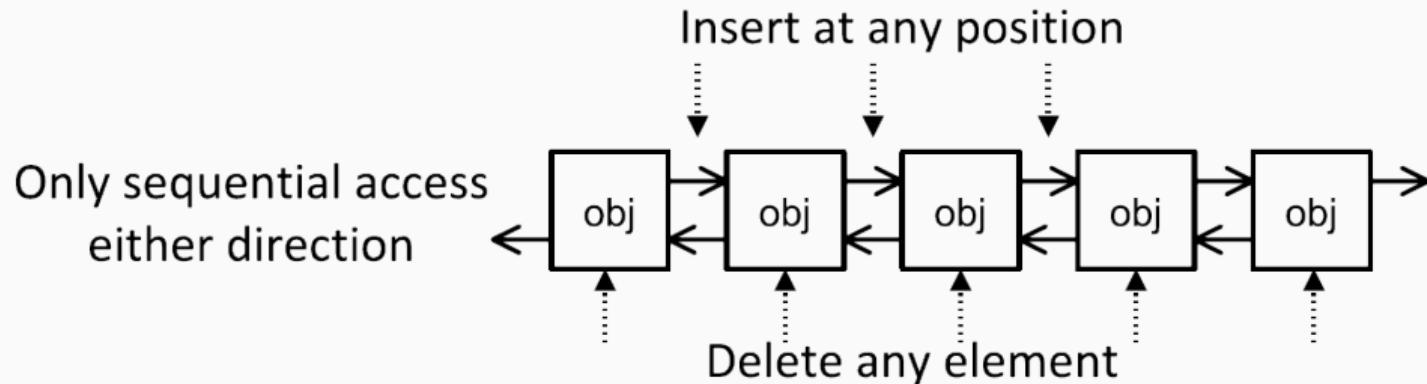


### Other methods:

- `resize()` resizes the allocated elements of the container
- `shrink_to_fit()` reallocate to remove unused capacity
- `clear()` removes all elements from the container (no reallocation)
- `remove()` removes all elements satisfying specific criteria
- `reverse()` reverses the order of the elements
- `unique()` removes all consecutive duplicate elements
- `sort()` sorts the container elements

## `std::forward_list`

Only sequential access  
forwards only

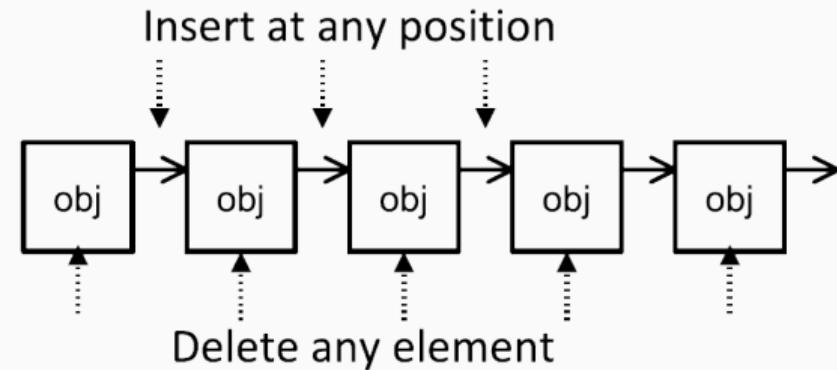

### Other methods:

- `resize()` resizes the allocated elements of the container
- `shrink_to_fit()` reallocate to remove unused capacity
- `clear()` removes all elements from the container (no reallocation)
- `remove()` removes all elements satisfying specific criteria
- `reverse()` reverses the order of the elements
- `unique()` removes all consecutive duplicate elements
- `sort()` sorts the container elements

## Supported Operations and Complexity

CONTAINERS	operator [] / at	front	back
std::array	$\mathcal{O}(1)$	$\mathcal{O}(1)$	$\mathcal{O}(1)$
std::vector	$\mathcal{O}(1)$	$\mathcal{O}(1)$	$\mathcal{O}(1)$
std::list		$\mathcal{O}(1)$	$\mathcal{O}(1)$
std::deque	$\mathcal{O}(1)$	$\mathcal{O}(1)$	$\mathcal{O}(1)$
std::forward_list		$\mathcal{O}(1)$	

CONTAINERS	push_front	pop_front	push_back	pop_back	insert(it)	erase(it)
std::array						
std::vector			$\mathcal{O}(1)^*$	$\mathcal{O}(1)^*$	$\mathcal{O}(n)$	$\mathcal{O}(n)$
std::list	$\mathcal{O}(1)$	$\mathcal{O}(1)$	$\mathcal{O}(1)$	$\mathcal{O}(1)$	$\mathcal{O}(1)$	$\mathcal{O}(1)$
std::deque	$\mathcal{O}(1)^*$	$\mathcal{O}(1)$	$\mathcal{O}(1)$	$\mathcal{O}(1)$	$\mathcal{O}(1)^*/\mathcal{O}(n)^\dagger$	$\mathcal{O}(1)$
std::forward_list	$\mathcal{O}(1)$	$\mathcal{O}(1)$			$\mathcal{O}(1)$	$\mathcal{O}(1)$

\* Amortized time

<sup>†</sup>Worst case (middle insertion)

## std::array example

```
#include <array>      // <--  
#include <iostream>   // std::array supports initialization  
int main() {          // only throw initialization list  
    std::array<int, 3> arr1 = { 5, 2, 3 };  
    std::array<int, 4> arr2 = { 1, 2 };           // [3]: 0, [4]: 0  
//  std::array<int, 3> arr3 = { 1, 2, 3, 4 }; // compiler error  
    std::array<int, 3> arr4(arr1);              // copy constructor  
    std::array<int, 3> arr5 = arr1;             // assign operator  
  
    arr5.fill(3);                            // equal to { 3, 3, 3 }  
    std::sort(arr1.begin(), arr1.end());       // arr1: 2, 3, 5  
    std::cout << (arr1 > arr2);             // true  
  
    std::cout << sizeof(arr1);               // 12  
    std::cout << arr1.size();                // 3  
    for (const auto& it : arr1)  
        std::cout << it << ", ";            // 2, 3, 5  
    std::cout << arr1[0];                   // 2  
    std::cout << arr1.at(0);                // 2 (safe)  
    std::cout << arr1.data()[0];            // 2 (raw array)  
}
```

## std::vector example

```
#include <vector>      // <--  
#include <iostream>  
int main() {  
    std::vector<int>           vec1 { 2, 3, 4 };  
    std::vector<std::string> vec2 = { "abc", "efg" };  
    std::vector<int>           vec3(2);      // [0, 0]  
    std::vector<int>           vec4{2};       // [2]  
    std::vector<int>           vec5(5, -1);   // [-1, -1, -1, -1, -1]  
  
    vec5.fill(3);                  // equal to { 3, 3, 3 }  
    std::cout << sizeof(vec1);     // 24  
    std::cout << vec1.size();      // 3  
    for (const auto& it : vec1)  
        std::cout << it << ", ";      // 2, 3, 5  
  
    std::cout << vec1[0];          // 2  
    std::cout << vec1.at(0);        // 2 (safe)  
    std::cout << vec1.data()[0];    // 2 (raw array)  
    vec1.push_back(5);             // [2, 3, 4, 5]  
}
```

## std::list example

```
#include <list>      // <--  
#include <iostream>  
  
int main() {  
    std::list<int>          list1 { 2, 3, 2 };  
    std::list<std::string> list2 = { "abc", "efg" };  
    std::list<int>          list3(2);      // [0, 0]  
    std::list<int>          list4{2};      // [2]  
    std::list<int>          list5(2, -1); // [-1, -1]  
    list5.fill(3);           // [3, 3]  
  
    list1.push_back(5);      // [2, 3, 2, 5]  
    list1.merge(arr5);      // [2, 3, 2, 5, 3, 3]  
    list1.remove(2);         // [3, 5, 3, 3]  
    list1.unique();          // [3, 5, 3]  
    list1.sort();            // [3, 3, 5]  
    list1.reverse();         // [5, 3, 3]  
}
```

## std::deque example

```
#include <deque>           // <--  
#include <iostream>  
  
int main() {  
    std::deque<int>           queue1 { 2, 3, 2 };  
    std::deque<std::string> queue2 = { "abc", "efg" };  
    std::deque<int>           queue3(2);      // [0, 0]  
    std::deque<int>           queue4{2};       // [2]  
    std::deque<int>           queue5(2, -1); // [-1, -1]  
    queue5.fill(3);           // [3, 3]  
  
    queue1.push_front(5);     // [5, 2, 3, 2]  
    queue1[0];                // returns 5  
}
```

## std::forward\_list example

```
#include <forward_list>      // <--  
#include <iostream>  
  
int main() {  
    std::forward_list<int>          flist1 { 2, 3, 2 };  
    std::forward_list<std::string> flist2 = { "abc", "efg" };  
    std::forward_list<int>          flist3(2);      // [0, 0]  
    std::forward_list<int>          flist4{2};      // [2]  
    std::forward_list<int>          flist5(2, -1); // [-1, -1]  
    flist5.fill(4);                  // [4, 4]  
  
    flist1.push_front(5);           // [5, 2, 3, 2]  
    flist1.insert_after(flist1.begin(), 0); // [5, 0, 2, 3, 2]  
    flist1.erase_after(flist1.begin(), 0); // [5, 2, 3, 2]  
    flist1.remove(2);               // [3, 5, 3, 3]  
    flist1.unique();                // [3, 5, 3]  
    flist1.sort();                 // [3, 3, 5]  
    flist1.reverse();               // [5, 3, 3]  
    flist1.merge(flist5);          // [5, 3, 3, 4, 4]  
}
```

# Associative Containers

---

## Overview

An **associative container** is a collection of elements not necessarily indexed with sequential integers and that supports efficient retrieval of the stored elements through keys

### Keys are unique


- `std::set` is a collection of sorted unique elements (operator`<`)
- `std::unordered_set` is a collection of unsorted unique keys
- `std::map` is a collection of unique `<key, value>` pairs, sorted by keys
- `std::unordered_map` is a collection of unique `<key, value>` pairs, unsorted

### Multiple entries for the same key are permitted


- `std::multiset` is a collection of sorted elements (operator`<`)
- `std::unordered_multiset` is a collection of unsorted elements
- `std::multimap` is a collection of `<key, value>` pairs, sorted by keys

# Internal Representation

Sorted associative containers are typically implemented using *red-black trees*, while unsorted associative containers (**C++11**) are implemented using *hash tables*

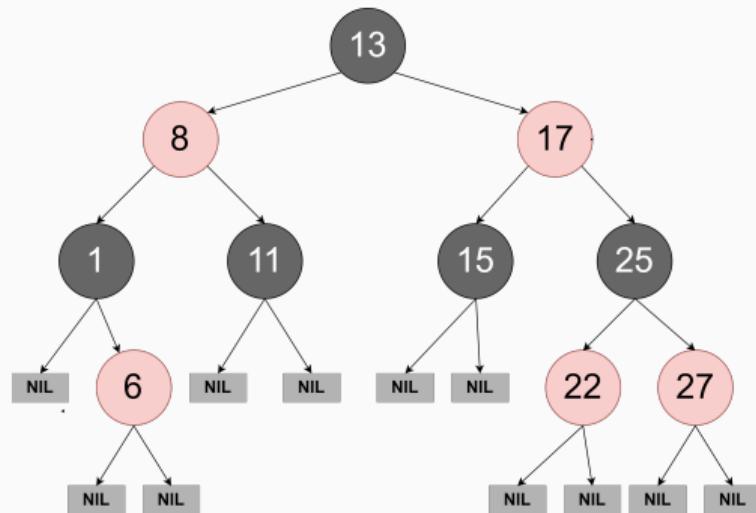

Red-Black Tree

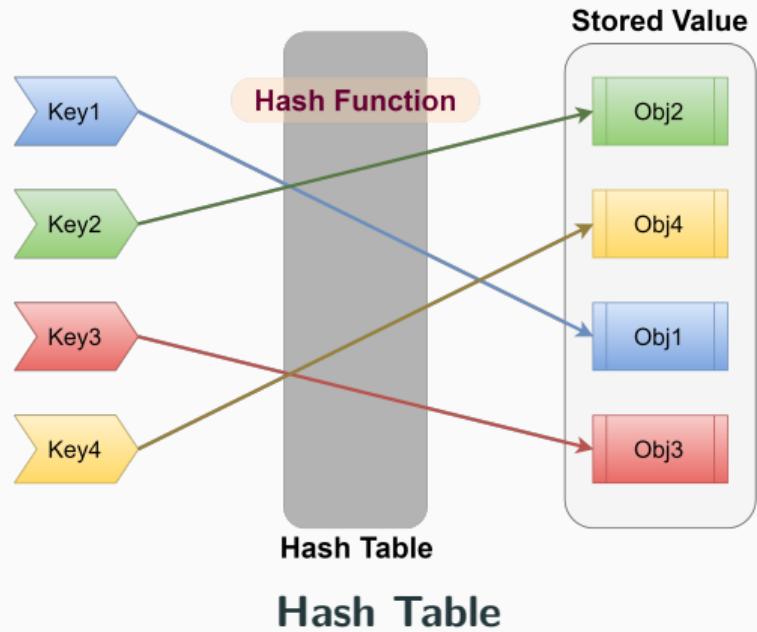

# Supported Operations and Complexity

CONTAINERS	insert	erase	count	find	lower_bound upper_bound
Sorted Containers	$\mathcal{O}(\log(n))$	$\mathcal{O}(\log(n))$	$\mathcal{O}(\log(n))$	$\mathcal{O}(\log(n))$	
Unsorted Containers	$\mathcal{O}(1)^*$	$\mathcal{O}(1)^*$	$\mathcal{O}(1)^*$	$\mathcal{O}(1)^*$	$\mathcal{O}(\log(n))$

\*  $\mathcal{O}(n)$  worst case

- `count()` returns the number of elements with `key` equal to a specified argument
- `find()` returns the element with `key` equal to a specified argument
- `lower_bound()` returns an iterator pointing to the first element that is *not less* than `key`
- `upper_bound()` returns an iterator pointing to the first element that is *greater* than `key`

## Other Methods

### Sorted/Unsorted containers:

- `equal_range()` returns a range containing all elements with the given `key`

### `std::map`, `std::unordered_map`

- `operator[]/at()` returns a reference to the element having the specified key in the container. A new element is generated in the set unless the key is found

### Unsorted containers:

- `bucket_count()` returns the number of buckets in the container
- `reserve()` sets the number of buckets to the number needed to accommodate at least `count` elements without exceeding maximum load factor and rehashes the container

## std::set example

```
#include <set>      // <--  
#include <iostream>  
  
int main() {  
    std::set<int>          set1 { 5, 2, 3, 2, 7 };  
    std::set<int>          set2 = { 2, 3, 2 };  
    std::set<std::string>  set3 = { "abc", "efg" };  
    std::set<int>          set4;           // empty set  
  
    set2.erase(2);          // [ 3 ]  
    set3.insert("hij");    // [ "abc", "efg", "hij" ]  
    for (const auto& it : set1)  
        std::cout << it << " ";           // 2, 3, 5, 7 (sorted)  
  
    auto search = set1.find(2);    // iterator  
    std::cout << search != set1.end(); // true  
    auto it     = set1.lower_bound(4);  
    std::cout << *it;             // 5  
    set1.count(2);              // 1, note: it can only be 0 or 1  
    auto it_pair = set1.equal_range(2); // iterator between [2, 3)  
}
```

## std::map example

```
#include <map>      // <--  
#include <iostream>  
  
int main() {  
    std::map<std::string, int> map1 { {"bb", 5}, {"aa", 3} };  
    std::map<double, int> map2;           // empty map  
  
    std::cout << map1["aa"];            // prints 3  
    map1["dd"] = 3;                   // insert <"dd", 3>  
    map1["dd"] = 7;                   // change <"dd", 7>  
    std::cout << map1["cc"];            // insert <"cc", 0>  
    for (const auto& it : map1)  
        std::cout << it.second << " "; // 3, 5, 0, 7  
  
    map1.insert( {"jj", 1} );          // insert pair  
    auto search = set1.find("jj");     // iterator  
    std::cout << search != set1.end(); // true  
    auto it      = set1.lower_bound("bb");  
    std::cout << *it.second;          // 5  
}
```

## std::multiset example

```
#include <multiset>      // <-
#include <iostream>

int main() {
    std::multiset<int> mset1 {1, 2, 5, 2, 2};
    std::multiset<double> mset2; // empty map

    mset1.insert(5);
    for (const auto& it : mset1)
        std::cout << it << " "; // 1, 2, 2, 2, 5, 5
    std::cout << mset1.count(2); // prints 3

    auto it = mset1.find(3); // iterator
    std::cout << *it << " " << *(it + 1); // prints 5, 5

    it      = mset1.lower_bound(4);
    std::cout << *it;           // 5
}
```

# Container Adaptors

---

## Overview

**Container adapters** are interfaces for reducing the number of functionalities normally available in a container

The underlying container of a container adapters can be optionally specified in the declaration

The *STL Container Adapters* are:

- `std::stack` LIFO data structure  
default underlying container: `std::deque`
- `std::queue` FIFO data structure  
default underlying container: `std::deque`
- `std::priority_queue` (max) priority queue  
default underlying container: `std::vector`

## Container Adapters Methods

`std::stack` interface for a FILO (first-in, last-out) data structure

- `top()` accesses the top element
- `push()` inserts element at the top
- `pop()` removes the top element

`std::queue` interface for a FIFO (first-in, first-out) data structure

- `front()` access the first element
- `back()` access the last element
- `push()` inserts element at the end
- `pop()` removes the first element

`std::priority_queue` interface for a priority queue data structure (lookup to largest element by default)

- `top()` accesses the top element
- `push()` inserts element at the end
- `pop()` removes the first element

## Container Adaptor Examples

```
#include <stack>           // <--  
#include <queue>           // <--  
#include <priority_queue> // <--  
#include <iostream>  
  
int main() {  
    std::stack<int> stack1;  
    stack1.push(1); stack1.push(4);    // [1, 4]  
    stack1.top();      // 4  
    stack1.pop();      // [1]  
  
    std::queue<int> queue1;  
    queue1.push(1); queue1.push(4);    // [1, 4]  
    queue1.front();    // 1  
    queue1.pop();      // [4]  
  
    std::priority_queue<int> pqueue1;  
    pqueue1.push(1); queue1.push(5); queue1.push(4);    // [5, 4, 1]  
    pqueue1.top();      // 5  
    pqueue1.pop();      // [4, 1]  
}
```

# View

---

C++20 introduces `std::span` which is a non-owning view of an underlying sequence or array

A `std::span` can either have a static extent, in which case the number of elements in the sequence is known at compile-time, or a dynamic extent

```
template<
    class      T,
    std::size_t Extent = std::dynamic_extent
> class span;
```

```
#include <span>

int array1[] = {1, 2, 3};
std::span s1{array1}; // static extent

std::array<int, 3> array2 = {1, 2, 3};
std::span s2{array2}; // static extent

auto array3 = new int[3];
std::span s3{array3}; // dynamic extent

std::vector<int> v{1, 2, 3};
std::span s4{v.data(), v.size()}; // dynamic extent
```

```
void f(std::span<int> span) {
    for (auto x : span) // range-based loop (safe)
        cout << x;
    std::fill(span.begin(), span.end(), 3); // std algorithms
}


int array1[] = {1, 2, 3};
f(array1);

auto array2 = new int[3];
f({array2, 3});
```

# Implement a Custom Iterator

---

# Iterator Categories/Tags

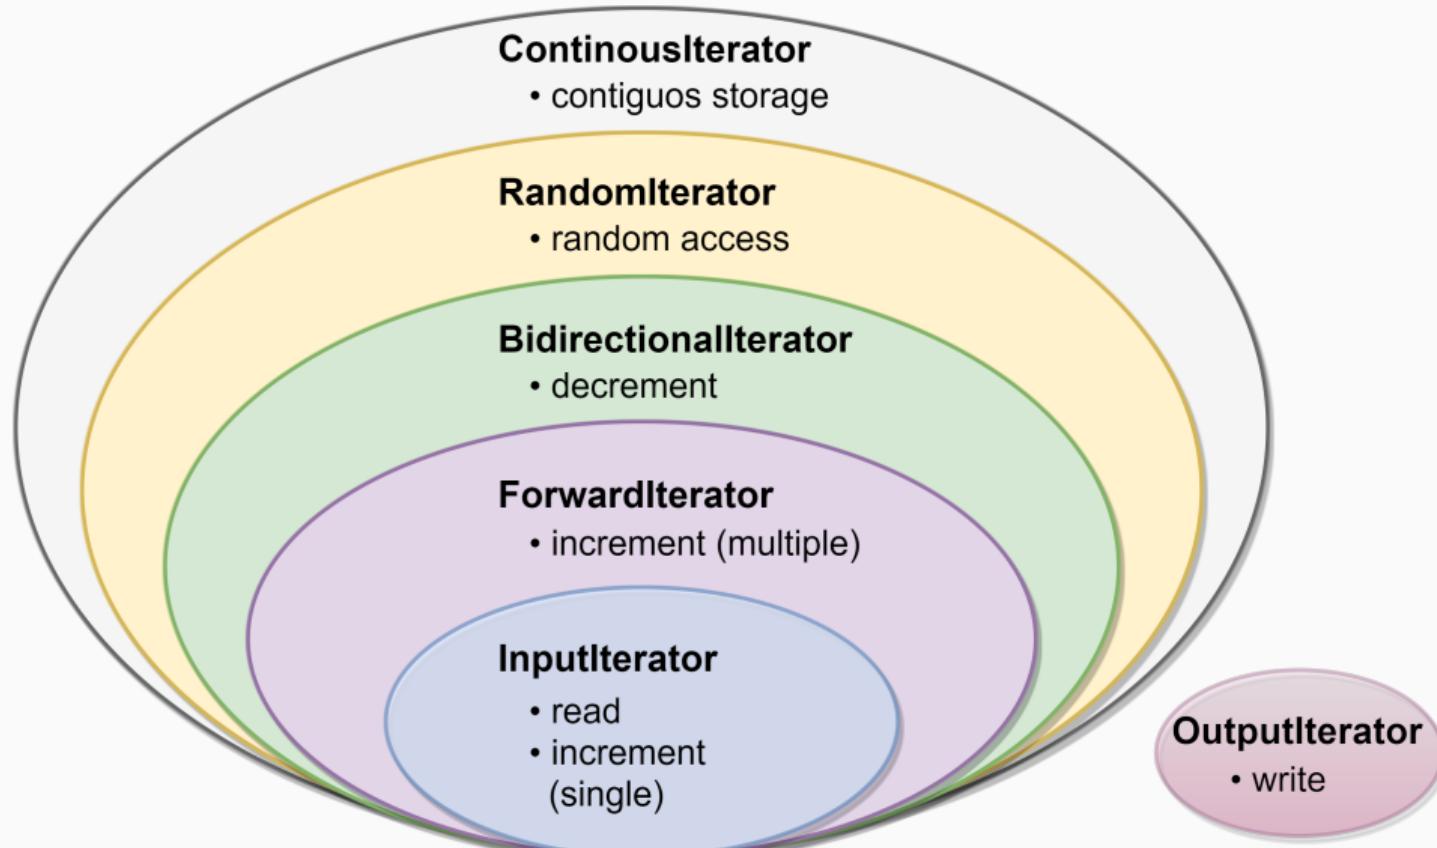

## Iterator

- Copy Constructible `It(const It&)`
- Copy Assignable `It operator=(const It&)`
- Destructible `~X()`
- Dereferenceable `It_value& operator*()`
- Pre-incrementable `It& operator++()`

## Input/Output Iterator

- Satisfy Iterator
- Equality `bool operator==(const It&)`
- Inequality `bool operator!=(const It&)`
- Post-incrementable `It operator++(int)`

## Forward Iterator

- Satisfy Input/Output Iterator
- Default constructible `It()`

## Bidirectional Iterator

- Satisfy Forward Iterator
- Pre/post-decrementable `It& operator--()`, `It operator--(int)`

## Random Access Iterator

- Satisfy Bidirectional Iterator

- Addition/Subtraction

```
void operator+(const It& it), void operator+=(const It& it),  
void operator-(const It& it), void operator.=(const It& it)
```

- Comparison

```
bool operator<(const It& it), bool operator>(const It& it),  
bool operator<=(const It& it), bool operator>=(const It& it)
```

- Subscripting `It_value& operator[](int index)`

**Goal:** implement a simple iterator to iterate over a `List` elements:

```
#include <iostream>

// !! List implementation here

int main() {
    List list;
    list.push_back(2);
    list.push_back(4);
    list.push_back(7);
    std::cout << *std::find(list.begin(), list.end(), 4); // print 4

    for (const auto& it : list) // range-based loop
        std::cout << it << " "; // 2, 4, 7
}
```

*Range-based loops* require: `begin()`, `end()`, pre-increment `++it`, not equal comparison `it != end()`, dereferencing `*it`

## Implement a Simple Iterator (List declaration)

2/6

```
using value_t = int;
struct List {
    struct Node {          // Internal Node Structure
        value_t _value;   // Node value
        Node*   _next;    // Pointer to next node
    };
    Node* _head { nullptr }; // head of the list
    Node* _tail { nullptr }; // tail of the list

    void push_back(const value_t& value); // insert a value
                                            // at the end

    // !! here we have to define the List iterator "It"
    It begin() { return It{head}; } // begin of the list
    It end()   { return It{nullptr}; } // end of the list
};


```

## Implement a Simple Iterator (List definition)

3/6

```
void List::push_back(const value_t& value) {
    auto new_node = new Node{value, nullptr};
    if (head == nullptr) { // empty list
        head = new_node;    // head is updated
        tail = head;
        return;
    }
    assert(tail != nullptr);
    tail->_next = new_node; // add new node at the end
    tail         = new_node; // tail is updated
}
```

## Implement a Simple Iterator (Iterator declaration)

4/6

```
#include <iterator> // for "std::iterator", outside List declaration

struct It : public std::iterator<std::input_iterator_tag,
                                value_t> { // dereferencing type
    Node* _ptr;           // internal pointer

    It(Node* ptr);       // Constructor

    int& operator*(); // Deferencing

    friend bool operator!=(const It& itA, const It& itB); // Not equal

    It& operator++();   // Pre-increment

    It operator++(int); // Post-increment
};
```

## Implement a Simple Iterator (Iterator definition)

5/6

```
void It::It(Node* ptr) :_ptr(ptr) {}

int& It::operator*() { return _ptr->_data; }

bool operator!=(const It& itA, const It& itB) {
    return itA._ptr != itB._ptr;
}

It& It::operator++() {
    _ptr = _ptr->_next;
    return *this;
}

It& It::operator++(int) {
    auto tmp = *this;
    ++(*this);
    return tmp;
}
```

Without extending `std::iterator`. Needed by `std` algorithms

```
#include <iterator>

struct It {
    using iterator_category = std::forward_iterator_tag;
    using difference_type   = std::ptrdiff_t;
    using value_type         = value_t;
    using pointer             = value_t*;
    using reference           = value_t&;
    ...
};
```

# Iterator Utility Methods

---

- `std::advance(InputIt& it, Distance n)`

Increments a given iterator `it` by `n` elements

- `InputIt` must support input iterator requirements
- Modifies the iterator
- Returns `void`
- More general than adding a value `it + 4`
- No performance loss if `it` satisfies random access iterator requirements

- `std::next(ForwardIt it, Distance n)` C++11

Returns the `n`-th successor of the iterator

- `ForwardIt` must support forward iterator requirements
- Does not modify the iterator
- More general than adding a value `it + 4`
- The compiler should optimize the computation if `it` satisfies random access iterator requirements
- Supports negative values if `it` satisfies bidirectional iterator requirements

- `std::prev(BidirectionalIt it, Distance n)` C++11

Returns the n-th predecessor of the iterator

- `InputIt` must support bidirectional iterator requirements
- Does not modify the iterator
- More general than adding a value `it + 4`
- The compiler should optimize the computation if `it` satisfies random access iterator requirements

- `std::distance(InputIt start, InputIt end)`

Returns the number of elements from start to last

- `InputIt` must support input iterator requirements
- Does not modify the iterator
- More general than adding iterator difference `it2 - it1`
- The compiler should optimize the computation if `it` satisfies random access iterator requirements
- C++11 Supports negative values if `it` satisfies random iterator requirements

## Examples

```
#include <iterator>
#include <iostream>
#include <vector>
#include <forward_list>
int main() {
    std::vector<int> vector { 1, 2, 3 }; // random access iterator

    auto it1 = std::next(vector.begin(), 2);
    auto it2 = std::prev(vector.end(), 2);
    std::cout << *it1;    // 3
    std::cout << *it2;    // 2
    std::cout << std::distance(it2, it1); // 1

    std::advance(it2, 1);
    std::cout << *it2;    // 3

    //-----
    std::forward_list<int> list { 1, 2, 3 }; // forward iterator
// std::prev(list.end(), 1);                // compile error
}
```

# Range Access Methods

C++11 provides a generic interface for containers, plain arrays, and std::initializer\_list to access to the corresponding iterator.

Standard method `.begin()` , `.end()` etc., are not supported by plain array and initializer list

- `std::begin` begin iterator
- `std::cbegin` begin const iterator
- `std::rbegin` begin reverse iterator
- `std::crbegin` begin const reverse iterator
- `std::end` end iterator
- `std::cend` end const iterator
- `std::rend` end reverse iterator
- `std::crend` end const reverse iterator

```
#include <iterator>
#include <iostream>

int main() {
    int array[] = { 1, 2, 3 };

    for (auto it = std::crbegin(array); it != std::crend(array); it++)
        std::cout << *it << ", ";    // 3, 2, 1
}
```

`std::iterator_traits` allows retrieving iterator properties

- `difference_type` a type that can be used to identify distance between iterators
- `value_type` the type of the values that can be obtained by dereferencing the iterator. This type is void for output iterators
- `pointer` defines a pointer to the type iterated over `value_type`
- `reference` defines a reference to the type iterated over `value_type`
- `iterator_category` the category of the iterator. Must be one of iterator category tags

```
#include <iterator>

template<typename T>
void f(const T& list) {
    using D = std::iterator_traits<T>::difference_type;           // D is std::ptrdiff_t
                                                               // (pointer difference)
                                                               // (signed size_t)
    using V = std::iterator_traits<T>::value_type;                 // V is double
    using P = std::iterator_traits<T>::pointer;                     // P is double*
    using R = std::iterator_traits<T>::reference;                  // R is double&

    // C is BidirectionalIterator
    using C = std::iterator_traits<T>::iterator_category;
}

int main() {
    std::list<double> list;
    f(list);
}
```

# Algorithms Library

---

## C++ STL Algorithms library

The algorithms library provides functions for a variety of purposes (e.g. searching, sorting, counting, manipulating) that operate on ranges of elements

- STL Algorithm library allow great flexibility which makes included functions suitable for solving real-world problem
- The user can adapt and customize the STL through the use of function objects
- Library functions work independently on containers and plain array

```
#include <algorithm>
#include <vector>
struct Unary {
    bool operator()(int value) {
        return value <= 6 && value >= 3;
    }
};

struct Descending {
    bool operator()(int a, int b) {
        return a > b;
    }
};

int main() {
    std::vector<int> vector { 7, 2, 9, 4 };
    // returns an iterator pointing to the first element in the range[3, 6]
    std::find_if(vector.begin(), vector.end(), Unary());
    // sort in descending order : { 9, 7, 4, 2 };
    std::sort(vector.begin(), vector.end(), Descending());
}
```

```
#include <algorithm> // it includes also std::multiplies
#include <vector>
#include <cstdlib> // std::rand
struct Unary {
    bool operator()(int value) {
        return value > 100;
    }
};

int main() {
    std::vector<int> vector { 7, 2, 9, 4 };

    int product = std::accumulate(vector.begin(), vector.end(), // product = 504
                                  1, std::multiplies<int>());
    std::srand(0);
    std::generate(vector.begin(), vector.end(), std::rand);
    // now vector has 4 random values

    std::remove_if(vector.begin(), vector.end(), Unary());
} // remove all values > 100
```

## STL Algorithms Library (Possible Implementations)

std::find

```
template<class InputIt, class T>
InputIt find(InputIt first, InputIt last, const T& value) {
    for (; first != last; ++first) {
        if (*first == value)
            return first;
    }
    return last;
}
```

std::generate

```
template<class ForwardIt, class Generator>
void generate(ForwardIt first, ForwardIt last, Generator g) {
    while (first != last)
        *first++ = g();
}
```

- `swap(v1, v2)` Swaps the values of two objects
- `min(x, y)` Finds the minimum value between x and y
- `max(x, y)` Finds the maximum value between x and y
- `min_element(begin, end)` (returns a pointer)  
Finds the minimum element in the range [begin, end)
- `max_element(begin, end)` (returns a pointer)  
Finds the maximum element in the range [begin, end)
- `minmax_element(begin, end)` C++11 (returns pointers <min,max>)  
Finds the minimum and the maximum element in the range [begin, end)

- **equal**(begin1, end1, begin2)

Determines if two sets of elements are the same in  
[begin1, end1), [begin2, begin2 + end1 - begin1)

- **mismatch**(begin1, end1, begin2)

(returns pointers <pos1, pos2>)

Finds the first position where two ranges differ in  
[begin1, end1), [begin2, begin2 + end1 - begin1)

- **find**(begin, end, value)

(returns a pointer)

Finds the first element in the range [begin, end) equal to value

- **count**(begin, end, value)

Counts the number of elements in the range [begin, end) equal to value

- `sort(begin, end)` (in-place)

Sorts the elements in the range [begin, end) in ascending order

- `merge(begin1, end1, begin2, end2, output)`

Merges two sorted ranges [begin1, end1), [begin2, end2), and store the results in [output, output + end1 - start1)

- `unique(begin, end)` (in-place)

Removes consecutive duplicate elements in the range [begin, end)

- `binary search(begin, end, value)`

Determines if an element value exists in the (sorted) range [begin, end)

- `accumulate(begin, end, value)`

Sums up the range [begin, end) of elements with initial value (common case equal to zero)

- `partial_sum(begin, end)` (in-place)

Computes the inclusive prefix-sum of the range [begin, end)

- `fill(begin, end, value)`  
Fills a range of elements [begin, end) with value
- `iota(begin, end, value)` C++11  
Fills the range [begin, end) with successive increments of the starting value
- `copy(begin1, end1, begin2)`  
Copies the range of elements [begin1, end1) to the new location  
[begin2, begin2 + end1 - begin1)
- `swap_ranges(begin1, end1, begin2)`  
Swaps two ranges of elements  
[begin1, end1), [begin2, begin2 + end1 - begin1)
- `remove(begin, end, value)` (in-place)  
Removes elements equal to value in the range [begin, end)
- `includes(begin1, end1, begin2, end2)`  
Checks if the (sorted) set [begin1, end1) is a subset of [begin2, end2)

- `set_difference(begin1, end1, begin2, end2, output)`  
Computes the difference between two (sorted) sets
- `set_intersection(begin1, end1, begin2, end2, output)`  
Computes the intersection of two (sorted) sets
- `set_symmetric_difference(begin1, end1, begin2, end2, output)`  
Computes the symmetric difference between two (sorted) sets
- `set_union(begin1, end1, begin2, end2, output)`  
Computes the union of two (sorted) sets
- `make_heap(begin, end)` Creates a max heap out of the range of elements
- `push_heap(begin, end)` Adds an element to a max heap
- `pop_heap(begin, end)` Remove an element (top) to a max heap

## Algorithm Library - Other Examples

```
#include <algorithm>

int a          = std::max(2, 5); // a = 5
int array1[] = {7, 6, -1, 6, 3};
int array2[] = {8, 2, 0, 3, 7};

int b = *std::max_element(array1, array1 + 5); // b = 7
auto c = std::minmax_element(array1, array1 + 5);
//c.first = -1, c.second = 7
bool d = std::equal(array1, array1 + 5, array2); // d = false

std::sort(array1, array1 + 5);                  // [-1, 3, 6, 6, 7]
std::unique(array1, array1 + 5);                // [-1, 3, 6, 7]
int e = accumulate(array1, array1 + 5, 0); // 15
std::partial_sum(array1, array1 + 5);           // [-1, 2, 8, 15]
std::iota(array1, array1 + 5, 2);               // [2, 3, 4, 5, 6]
std::make_heap(array2, array2 + 5);             // [8, 7, 0, 3, 2]
```